


Directional control valves, direct operated with electrical position feedback and integrated electronics (OBE)

Type 4WRPE



- ▶ Size 6
- ▶ Component series 3X
- ▶ Maximum operating pressure 350 bar
- ▶ Rated flow 8, 18, 32 l/min
- ▶ Digital interface, IO link for I4.0

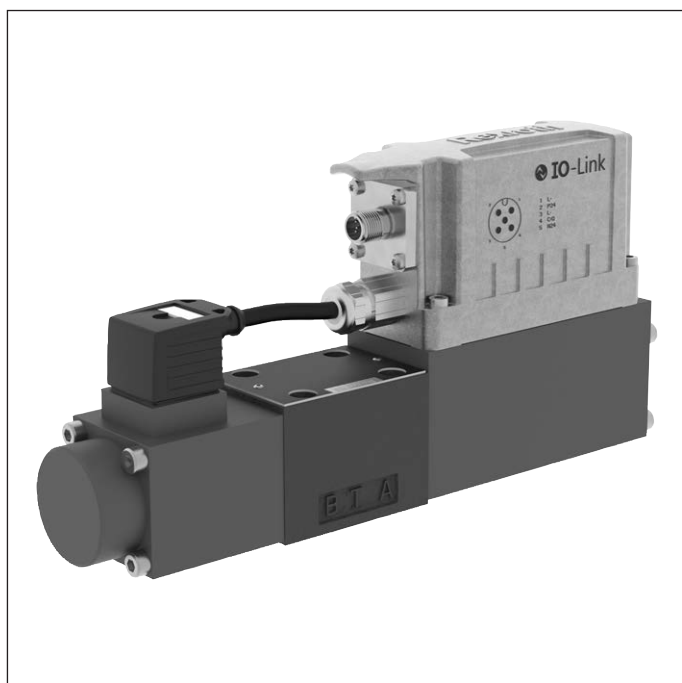

Features

- ▶ Reliable – proven and robust design
- ▶ Energy-efficient – no pilot oil demand, high flows with low pressure differential
- ▶ Flexible – suitable for position and velocity control
- ▶ Precise – high response sensitivity and little hysteresis
- ▶ IO-Link interface

Contents

Features	1
Ordering code	2
Symbols	3
Function, section	4
Technical data	5 ... 7
Electrical connections and assignment	8
Block diagram/controller function block	9
Characteristic curves	10 ... 19
Dimensions	20, 21
Accessories	22
Further information	22

Ordering code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15			
4	WRP	E	6			S		-	3X	/		/		24			*

01	4 main ports	4
02	Directional control valve, direct operated	WRP
03	With integrated electronics	E
04	Size 6	6
05	Symbols; possible version see page 3	

Rated flow (Δp = 5 bar/control edge)

06	8 l/min	8
	18 l/min	18
	32 l/min	32

Flow characteristic

07	Progressive	S
08	Without overlap jump	no code
	With overlap jump (opening point 5% command value with symbols E, E1-, W and W1-)	J
09	Component series 30 ... 39 (30 ... 39: unchanged installation and connection dimensions)	3X


Seal material (observe compatibility of seals with hydraulic fluid used, see page 6)

10	NBR seals	M
	FKM seals	V
11	Without damping plate	no code
	With damping plate	D
12	Supply voltage 24 V	24

Interfaces of the control electronics

13	IO-Link interface	L1
14	Without electronics protection membrane	no code
	With electronics protection membrane	-967
15	Further details in the plain text	

Symbols

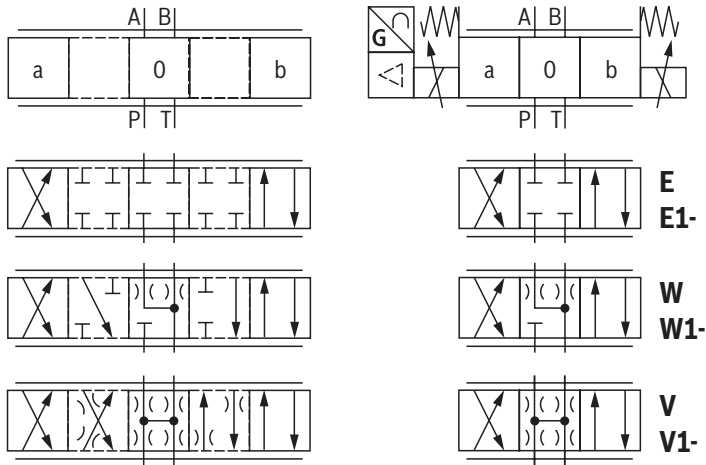

With symbol E1-, V1- and W1-:

$P \rightarrow A: q_{V \max}$ $B \rightarrow T: q_{V/2}$
 $P \rightarrow B: q_{V/2}$ $A \rightarrow T: q_{V \max}$



Notices:

- Representation according to DIN ISO 1219-1.
Hydraulic interim positions are shown by dashes.
- Only symbols E, E1-, W and W1- are suitable for applications according to EN 13849-1.
Further measures must be taken according to EN 13849-1 and operating instructions 29118-B must be observed.

Function, section

The valve type 4WRPE is a direct operated directional control valve with electric position feedback and integrated electronics (OBE).

Set-up

The valve basically consists of:

- ▶ Valve housing (1)
- ▶ Control spool (2) with compression springs (3.1 and 3.2)
- ▶ Control solenoid with position transducer (4) (optional with electronics protection membrane (8))
- ▶ Stroke solenoid (7)
- ▶ On-board electronics (OBE) (5) with IO-Link interface (optionally with damping plate (9))

Function

The integrated electronics (OBE) compares the specified command value to the position actual value. In case of control deviations, the relevant solenoid will be activated. Due to the changed magnetic force, the control spool (2) is adjusted against the corresponding spring. The stroke/control spool cross-section is regulated proportionally to the command value. In case of a command value presetting of 0 V, the electronics adjust the control spool (2) to central position.

Error detection

In the following cases of error, the electronics will de-energize the control solenoids:

- ▶ Falling below the minimum supply voltage ≤ 15 V (restarting ≥ 17.5 V).
- ▶ Interface "L1":
 - Enable inactive, communication interruption (watchdog)
 - In case of internal IO-Link error

The control spool (2) is kept in the mechanical central position by the compression springs (3.1 and 3.2) (with symbol V, this does not correspond to the hydraulic central position).

Safe shut-off with IO-Link

With symbols E, E1-, W and W1-, the valve can be used as shut-off element in applications of categories 1, 2 or 3 with up to PL d in compliance with EN 13849-1.

Depending on the category or application, additional safety measures must be taken according to EN 13849-1 and operating instructions 29118-B must be observed. In every safety-relevant application, a safe shut-off of the IO-Link-B voltage (pin 2 and 5) must be ensured according to EN 13849-1.

The safe shut-off is not part of the IO-Link valve and must be taken into account for the safe design of the machinery.

Damping plate "D"

The damping plate (9) reduces the acceleration amplitudes on the on-board electronics (frequencies > 300 Hz).

Notice:

Using the damping plate is not recommended for applications with mainly low-frequency excitation < 300 Hz.


Electronics protection membrane "-967"

To prevent condensate formation in the housing of the integrated electronics (OBE), an electronics protection membrane (8) can be used.

Recommended for use outside industry-standard conditions with high ambient air humidity and significant cyclic temperature changes (e.g. outdoors).

Notice:

With version "V32", the control spool may rotate in case of single-sided flow through the supply flow edges (P-A or P-B) causing damage to or failure of the valve. This can be solved by reducing the pressure differential over the supply flow edge to a maximum of 80 bar or by simultaneously using both control edges (P-A/B-T or P-B/A-T).

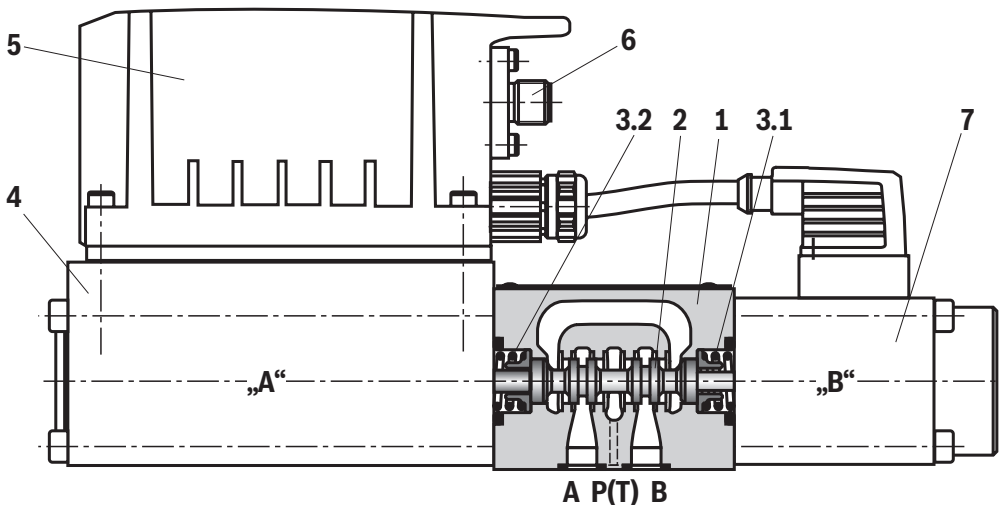

Technical data

(For applications outside these values, please consult us!)

General		
Weight	kg	7.6
Installation position		any
Ambient temperature range	°C	–20 ... +60
Storage temperature range with UV protection	°C	+10 ... +40
Transport temperature	°C	–30 ... +80
Maximum storage time	Years	1 (if the storage conditions are observed, refer to the operating instructions 07600-B)
Sine test according to DIN EN 60068-2-6	► Without damping plate	10 ... 2000 Hz / maximum of 10 g / 10 cycles / 3 axes
	► With damping plate ¹⁾	10 ... 2000 Hz / maximum of 10 g / 10 cycles / 3 axes
Noise test according to DIN EN 60068-2-64	► Without damping plate	20 ... 2000 Hz / 10 g _{RMS} / 30 g peak / 24 h / 3 axes
	► With damping plate ¹⁾	20 ... 2000 Hz / 10 g _{RMS} / 30 g peak / 24 h / 3 axes
Transport shock according to DIN EN 60068-2-27	► Without damping plate	15 g / 11 ms / 3 shocks / 3 axes
	► With damping plate ¹⁾	15 g / 11 ms / 3 shocks / 3 axes
Shock according to DIN EN 60068-2-27	► With damping plate ¹⁾	35 g / 6 ms / 1000 shocks / 3 axes
Maximum relative humidity (no condensation)	%	95
Maximum solenoid surface temperature	°C	150 (individual operation)
MTTF _d value according to EN ISO 13849	Years	150 (for further details see data sheet 08012)
Conformity	► CE according to EMC directive 2014/30/EU, tested according to	EN 61000-6-2 and EN 61000-6-3
	► RoHS directive	2011/65/EU ²⁾

Hydraulic					
Maximum operating pressure	► Ports A, B, P	bar	350		
	► Port T	bar	200		
Maximum flow ³⁾		l/min	80		
Rated flow (Δp = 5 bar/control edge ⁴⁾)		l/min	8	18	32
Zero flow ($\Delta p \geq 5$ bar/control edge)	► Symbol W-; A - T	l/min	0.8	1.2	1.2
	► Symbol W-; B - T	l/min	0.8	1.2	1.2
	► Symbol W1-; A - T	l/min	–	1.2	1.2
	► Symbol W1-; B - T	l/min	–	0.8	1.2
Hydraulic fluid			see table on page 6		
Viscosity range	► recommended	mm ² /s	20 ... 100		
	► maximum admissible	mm ² /s	10 ... 800		
Hydraulic fluid temperature range (flown-through)		°C	–20 ... +70		
Maximum admissible degree of contamination of the hydraulic fluid, cleanliness class according to ISO 4406 (c)			Class 18/16/13 ⁵⁾		

¹⁾ Not recommended for applications with mainly low-frequency excitation < 300 Hz

²⁾ The product fulfills the substance requirements of the RoHS directive 2011/65/EU.

³⁾ Recommended (flow velocity 30 m/s)

⁴⁾ Flow with deviating Δp (control edge):

$$q_x = q_{Vnom} \cdot \sqrt{\frac{\Delta p_x}{5}}$$

⁵⁾ The cleanliness classes specified for the components must be adhered to in hydraulic systems. Effective filtration prevents faults and at the same time increases the life cycle of the components.



Notice:

The specified technical data were measured with HLP46 and $\vartheta_{oil} = 40 \pm 5$ °C.

Technical data

(For applications outside these values, please consult us!)

Hydraulic fluid	Classification	Suitable sealing materials	Standards	Data sheet
Mineral oils	HL, HLP, HLPD, HVL, HVPD	NBR, FKM	DIN 51524	90220
Bio-degradable	► Insoluble in water	HETG	ISO 15380	90221
		HEES		
	► Soluble in water	HEPG	ISO 15380	
Flame-resistant	► Water-free	HFDU (glycol base)	ISO 12922	90222
		HFDU (ester base)		
		HFDR		
	► Containing water	HFC (Fuchs: Hydrotherm 46M, Renosafe 500; Petrofer: Ultra Safe 620; Houghton: Safe 620; Union: Carbide HP5046)	ISO 12922	90223

**Important information on hydraulic fluids:**

- For further information and data on the use of other hydraulic fluids, please refer to the data sheets above or contact us.
- There may be limitations regarding the technical valve data (temperature, pressure range, life cycle, maintenance intervals, etc.).
- The ignition temperature of the hydraulic fluid used must be 50 K higher than the maximum surface temperature.
- **Bio-degradable and flame-resistant – containing water:**
If components with galvanic zinc coating (e.g. version "J3" or "J5") or parts containing zinc are used, small amounts of dissolved zinc may get into the hydraulic system and cause accelerated aging of the hydraulic fluid. Zinc soap may form as a chemical reaction product, which may clog filters, nozzles and solenoid valves – particularly in connection with local heat input.

► Flame-resistant – containing water:

- Due to the increased cavitation tendency with HFC hydraulic fluids, the life cycle of the component may be reduced by up to 30% as compared to the use with mineral oil HLP. In order to reduce the cavitation effect, it is recommended – if possible specific to the installation – backing up the return flow pressure in ports T to approx. 20% of the pressure differential at the component.
- Dependent on the hydraulic fluid used, the maximum ambient and hydraulic fluid temperature must not exceed 50 °C. In order to reduce the heat input into the component, the command value profile is to be adjusted for proportional and high-response valves.

Static/dynamic		
Hysteresis	%	< 0.25
Range of inversion	%	< 0.1
Response sensitivity	%	< 0.1
Manufacturing tolerance q_{Vmax}	%	< 10
Temperature drift (temperature range 20 °C ... 80 °C)	%/10 K	Zero shift < 0.2
Pressure drift	%/100 bar	Zero shift < 0.2
Zero compensation		ex plant ±1%


Technical data

(For applications outside these values, please consult us!)

Electrical, Integrated Electronics (OBE) – Interface "L1"			
Relative duty cycle		%	100 (continuous operation)
Protection class according to EN 60529			IP 65 with mounted and locked plug-in connectors
Supply voltage	► Valve amplifier	VDC	24
	– Pin 2	VDC	min. 18 / max. 30
	– Pin 5	VDC	0
	► IO-Link interface	VDC	24
	– Pin 1	VDC	min. 18 / max. 30
	– Pin 3	VDC	0
Maximum current consumption	► Valve amplifier	A	2
	► IO-Link interface	mA	50
Maximum residual ripple		Vpp	1.3
Maximum current consumption		mA	50
Minimum process cycle time		ms	0.6
Bit rate COM3		kBaud (kbit/s)	230.4
Required master port class			Class B
Resolution	► A/D transformer	bit	12 (110% valve opening)
	► D/A transformer	bit	12 (110% valve opening)
Functional ground			Provide via valve block
Adjustment			Calibrated in the plant
Directive			IO-Link Interface and System Specification Version 1.1.2

Electrical connections and assignment

Connector pin assignment "L1" (M12-5, A-coded, class B)

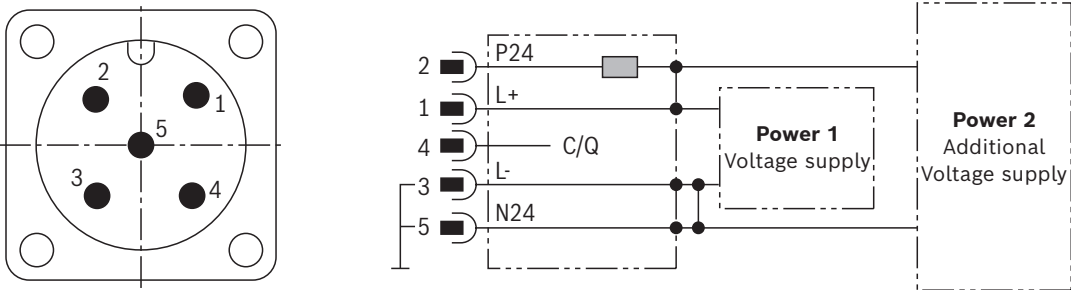


Notices:

- ▶ M12 sensor/actuator connection line, 5-pole; M12 connector/bush, A-coded, without shield, maximum cable length 20 m. Observe the voltage drop over the cable. Line cross-section at least 0.34 mm².
- ▶ Mating connectors, separate order, see page 22.
- ▶ For the communication and parameter description see data sheet 29400-PA
- ▶ With a line cross-section of 0.34 mm² (standard line), a maximum cable length of 10 m is possible. For a maximum cable length of 20 m, the cross-section must be doubled.

Pin	Signal	Allocation interface L1
1	L+	Voltage supply IO-Link
2	P24	Voltage supply valve electronics and power part (current consumption 3 A)
3	L-	Reference potential pin 1 ¹⁾
4	C/Q	Data line IO-Link (SDCI)
5	N24	Reference potential pin 2 ¹⁾

¹⁾ Pin 3 and 5 are linked with each other in the valve electronics. The reference potentials L- and N24 of the two supply voltages must also be linked with each other on the power supply unit side.

Block diagram/controller function block

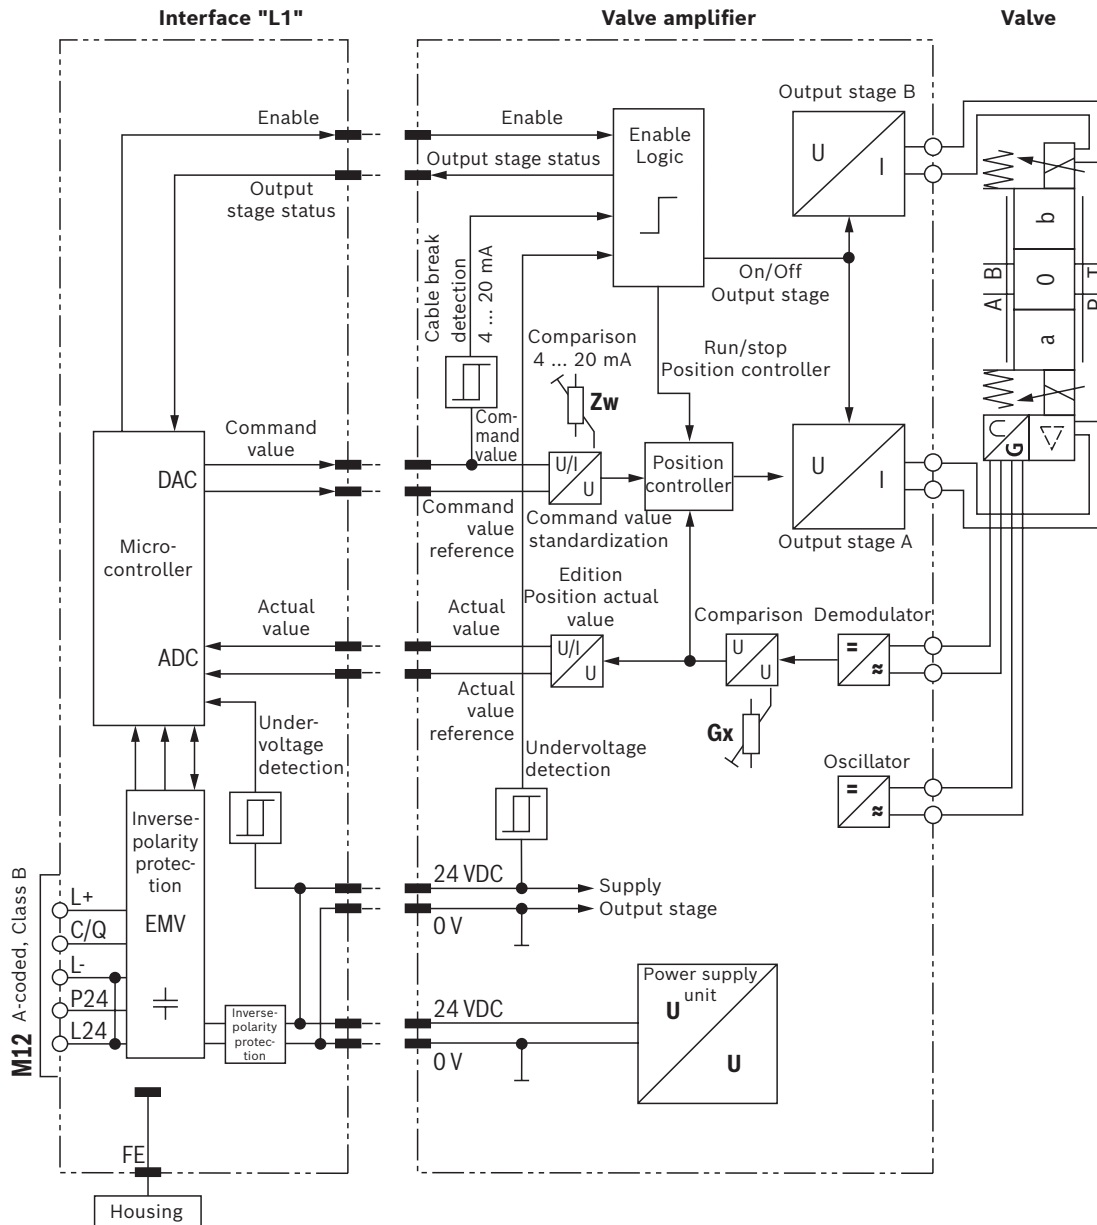


Notices:

- Electrical signals provided via control electronics (e.g. actual value) must not be used for switching off safety-relevant machine functions.
- The setting of the potentiometer at the factory must not be changed.

Characteristic curves


(measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ }^{\circ}\text{C}$)

Pressure/signal characteristic curve (symbol V)

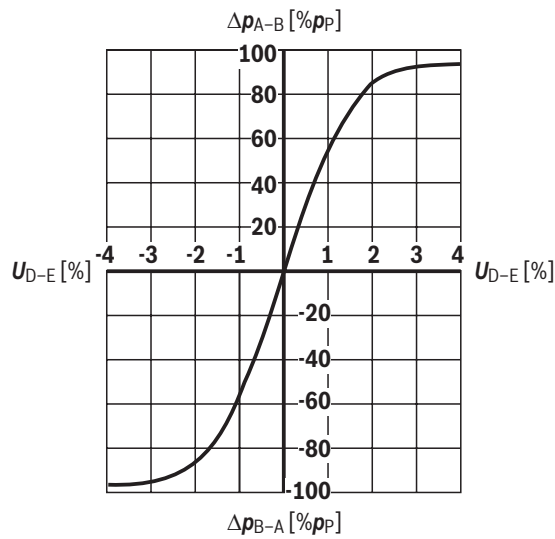

Flow/signal function (rated flow 8 l/min with $\Delta p = 5 \text{ bar}$ /control edge)

Symbol E

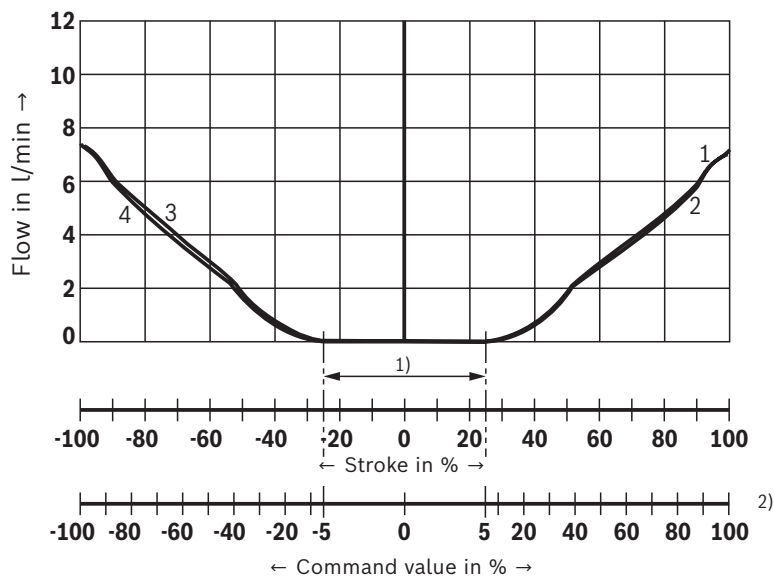

- 1 P-A
- 2 B-T
- 3 P-B
- 4 A-T





Notice:

Typical characteristic curves which are subject to tolerance variations.

Characteristic curves

(measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ } ^\circ\text{C}$)

Flow/signal function (rated flow 8 l/min with $\Delta p = 5 \text{ bar/control edge}$)

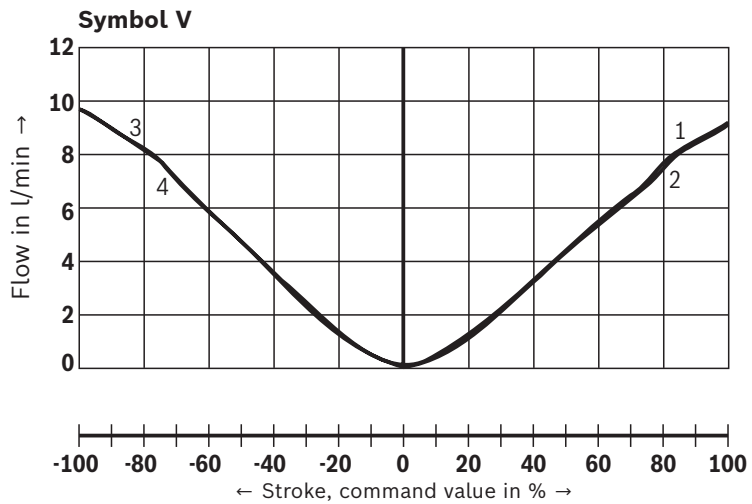
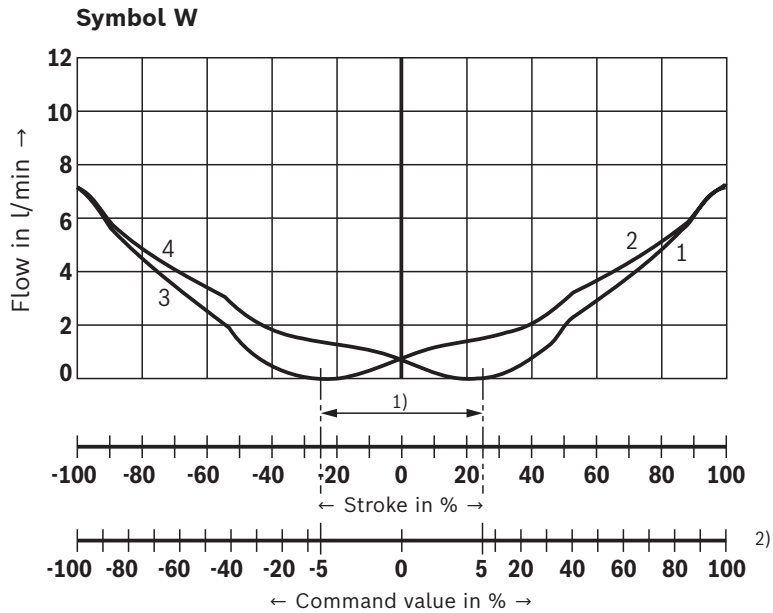


Notice:

Typical characteristic curves which are subject to tolerance variations.



Characteristic curves
(measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ }^{\circ}\text{C}$)

Flow/signal function (rated flow 18 l/min with $\Delta p = 5 \text{ bar/control edge}$)

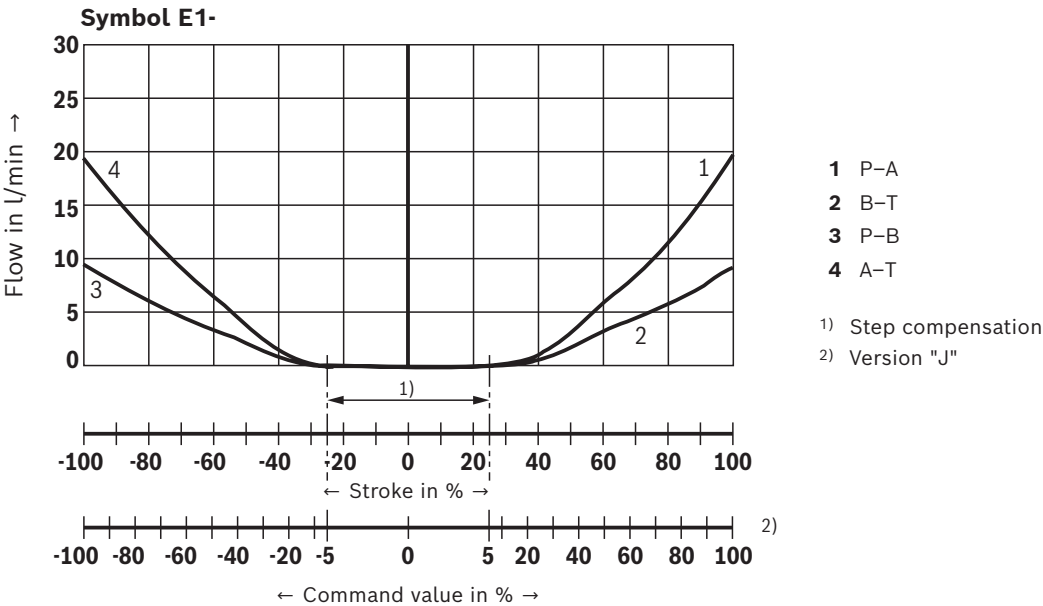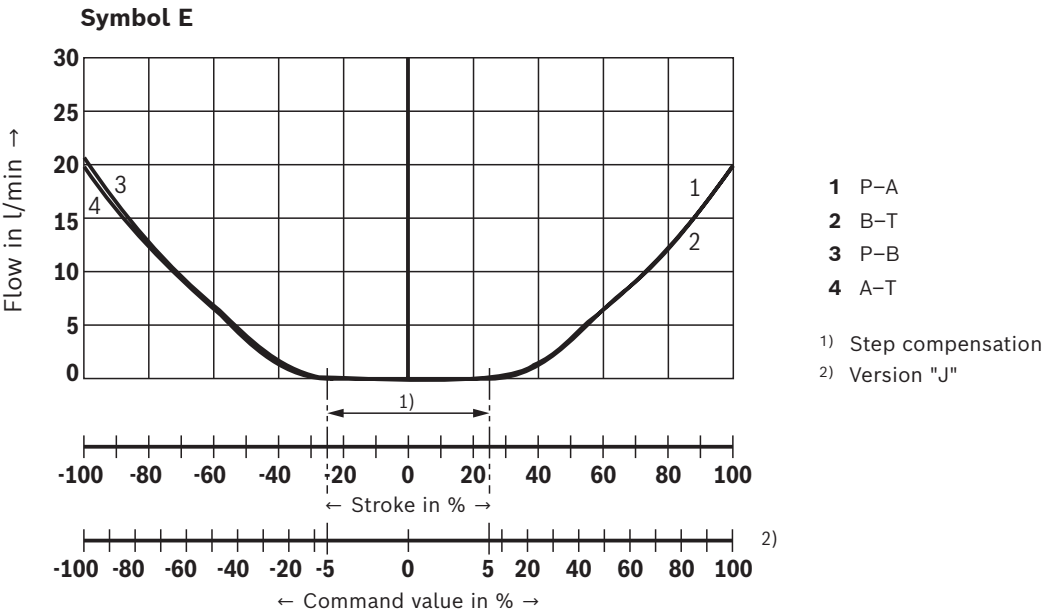

Notice:

Typical characteristic curves which are subject to tolerance variations.

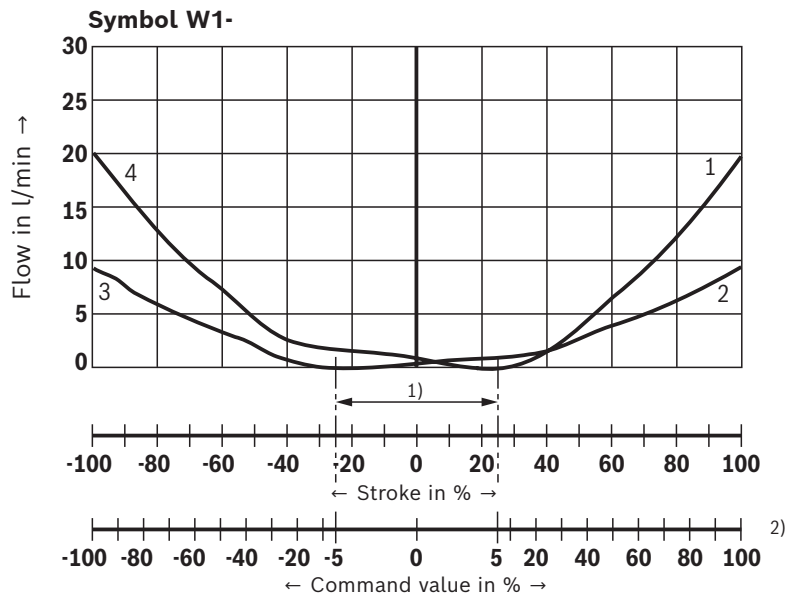
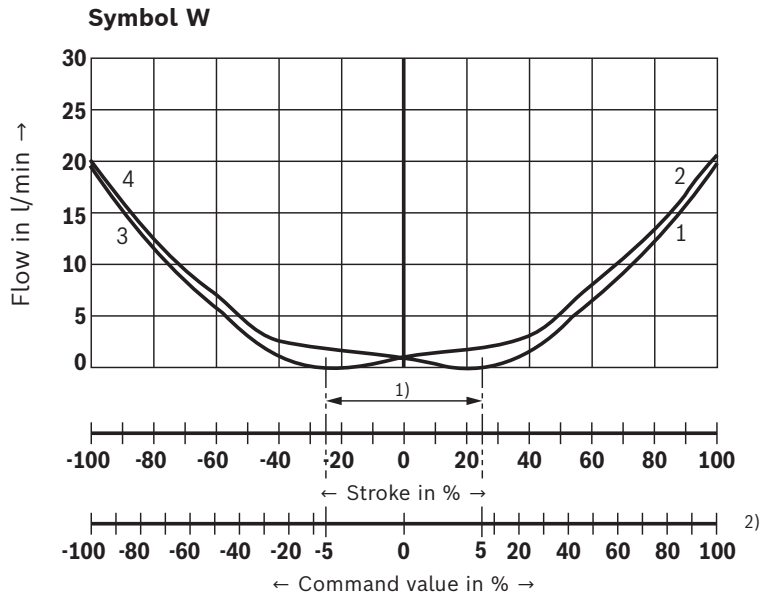
Characteristic curves(measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ } ^\circ\text{C}$)**Flow/signal function** (rated flow 18 l/min with $\Delta p = 5 \text{ bar/control edge}$)**Notice:**

Typical characteristic curves which are subject to tolerance variations.

Characteristic curves


(measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ }^{\circ}\text{C}$)

Flow/signal function (rated flow 18 l/min with $\Delta p = 5 \text{ bar/control edge}$)

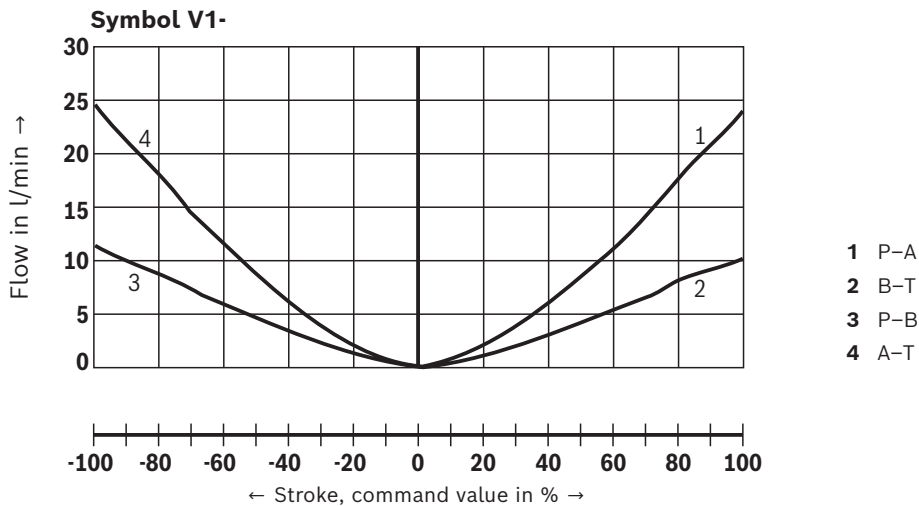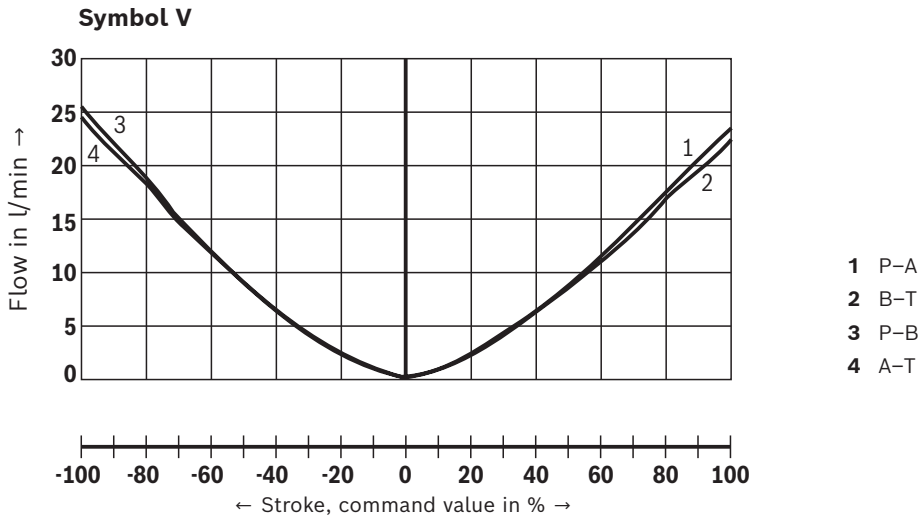

Notice:

Typical characteristic curves which are subject to tolerance variations.

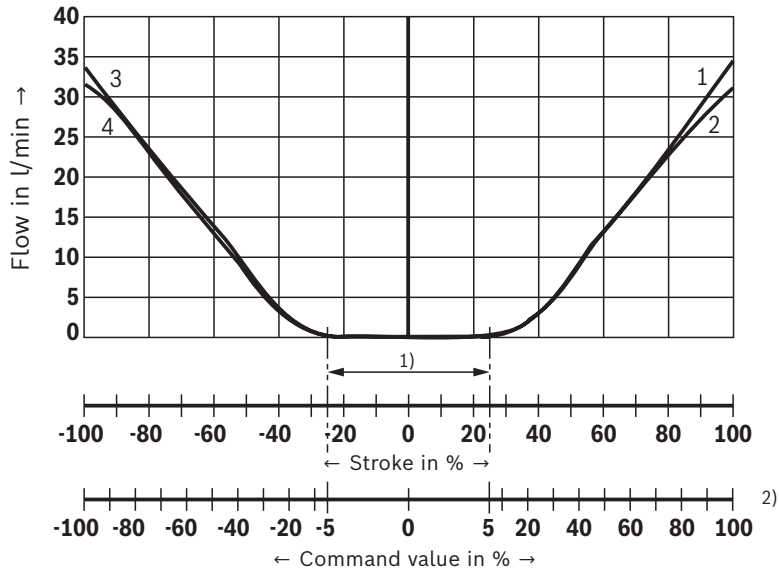Characteristic curves(measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ } ^\circ\text{C}$)**Flow/signal function** (rated flow 32 l/min with $\Delta p = 5 \text{ bar/control edge}$)**Symbol E**

1 P-A


2 B-T

3 P-B

4 A-T

1) Step compensation

2) Version "J"

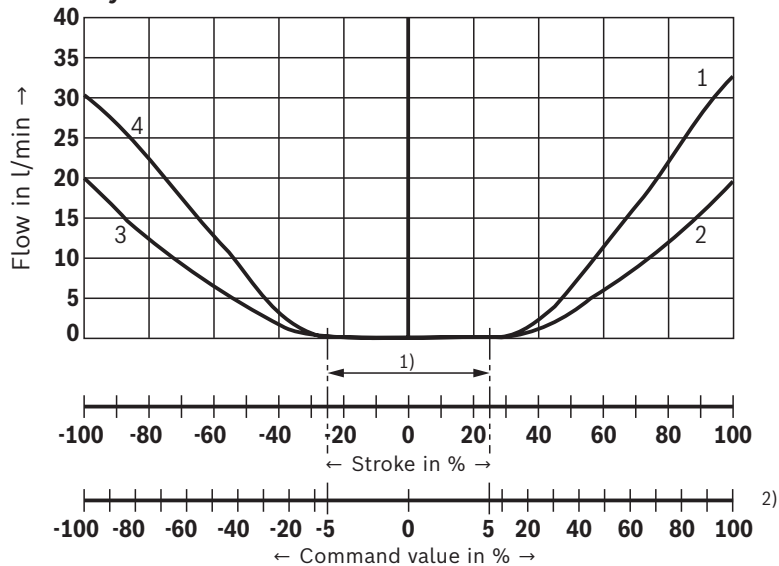Symbol E1-

1 P-A

2 B-T

3 P-B


4 A-T

1) Step compensation

2) Version "J"


**Notice:**

Typical characteristic curves which are subject to tolerance variations.

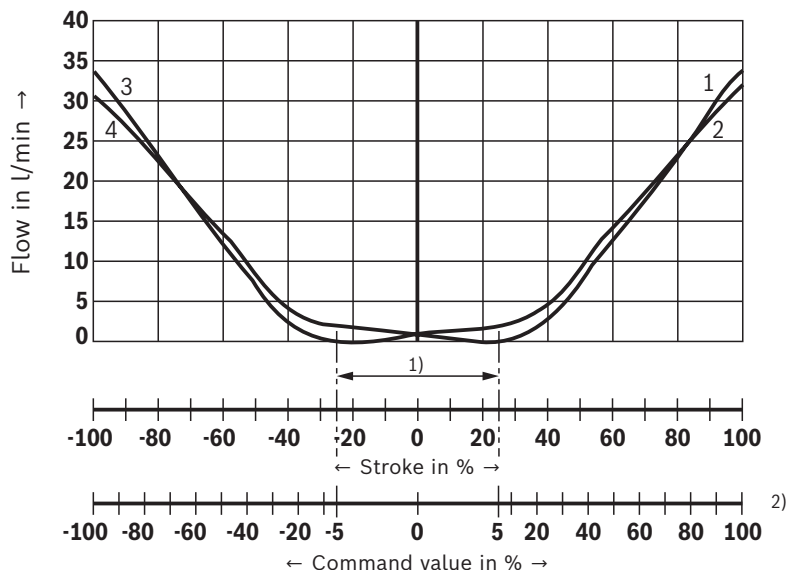Characteristic curves(measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ }^{\circ}\text{C}$)**Flow/signal function** (rated flow 32 l/min with $\Delta p = 5 \text{ bar/control edge}$)**Symbol W**

- 1 P-A
- 2 B-T
- 3 P-B
- 4 A-T

- 1) Step compensation
- 2) Version "J"


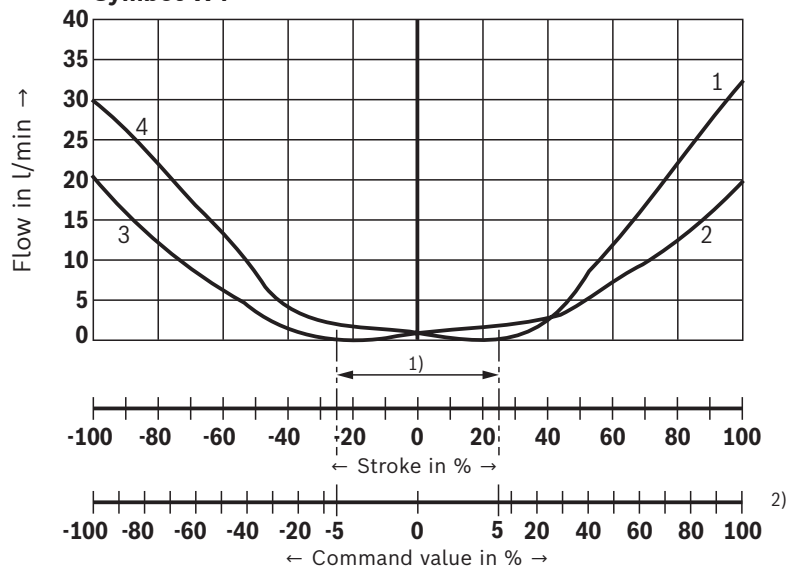
Symbol W1-

- 1 P-A
- 2 B-T
- 3 P-B
- 4 A-T

- 1) Step compensation
- 2) Version "J"

**Notice:**


Typical characteristic curves which are subject to tolerance variations.

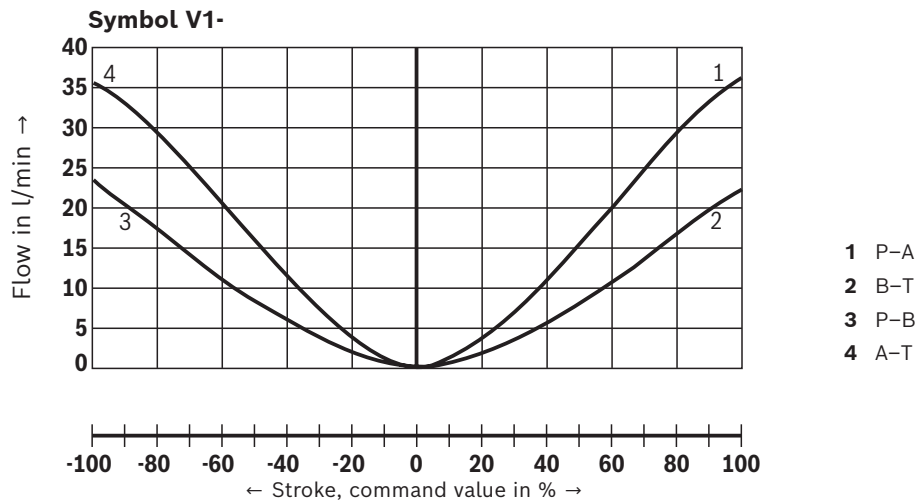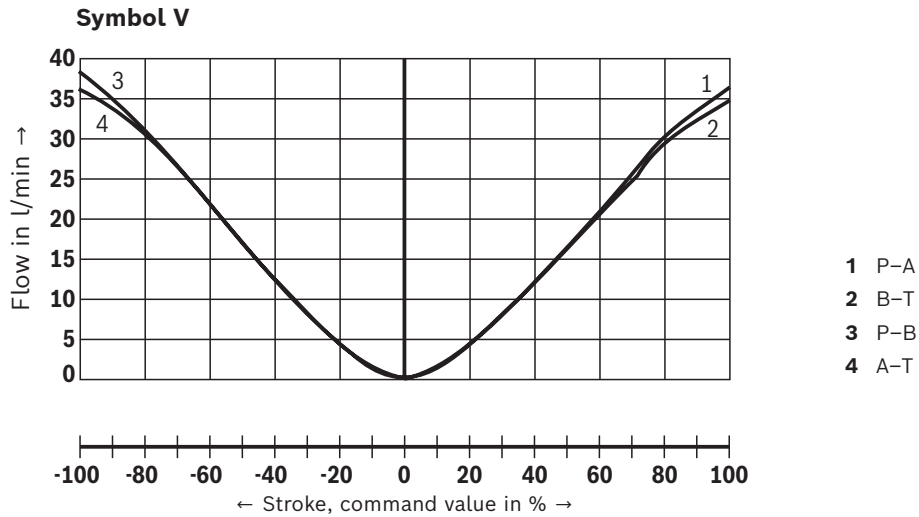Characteristic curves(measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ }^{\circ}\text{C}$)**Flow/signal function** (rated flow 32 l/min with $\Delta p = 5 \text{ bar}$ /control edge)**Notice:**


Typical characteristic curves which are subject to tolerance variations.


Characteristic curves
(measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ }^{\circ}\text{C}$)

Transition function with stepped electric input signals

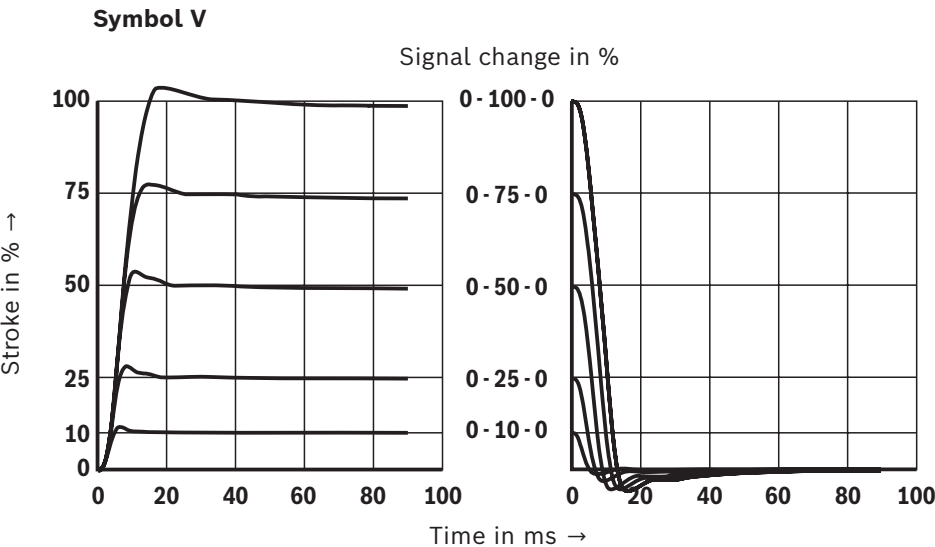


Frequency response

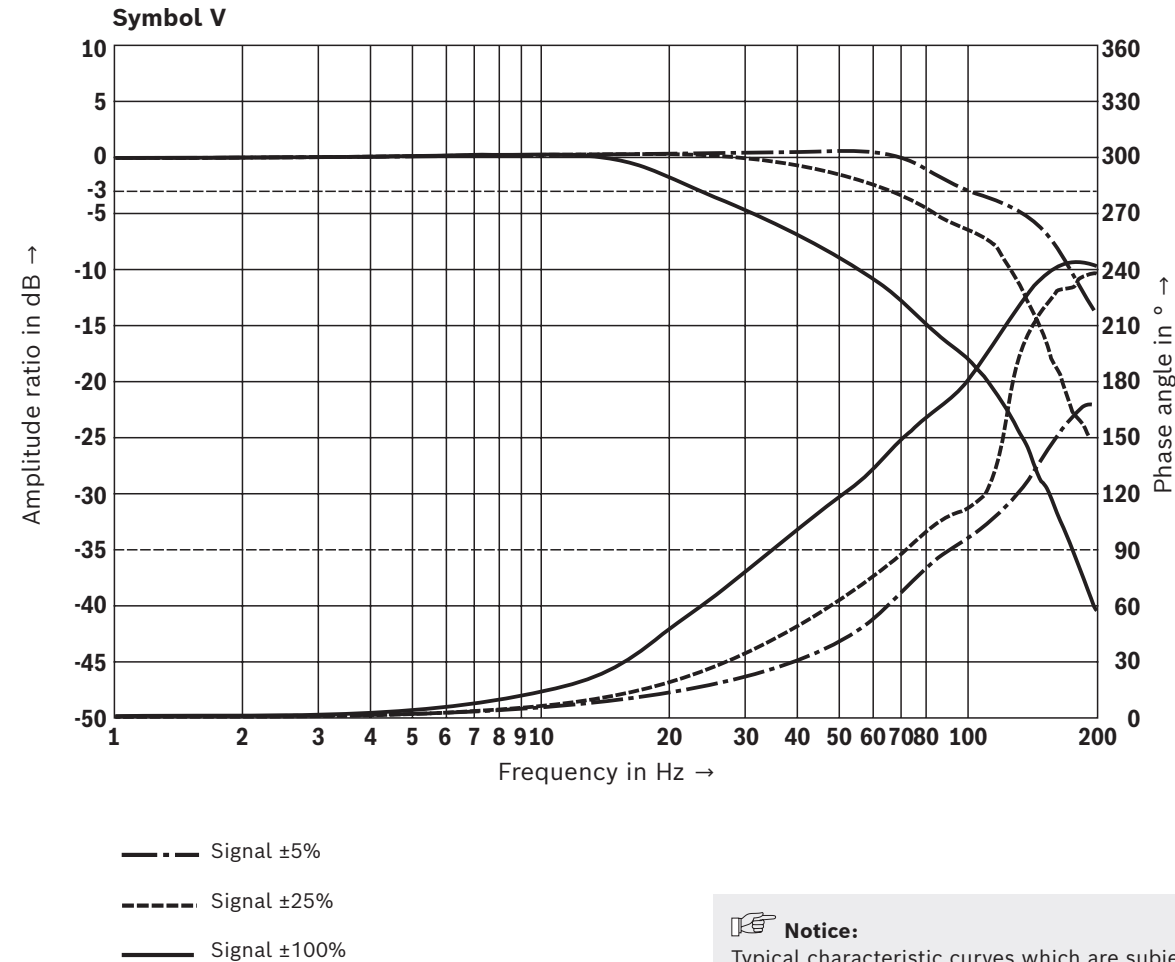


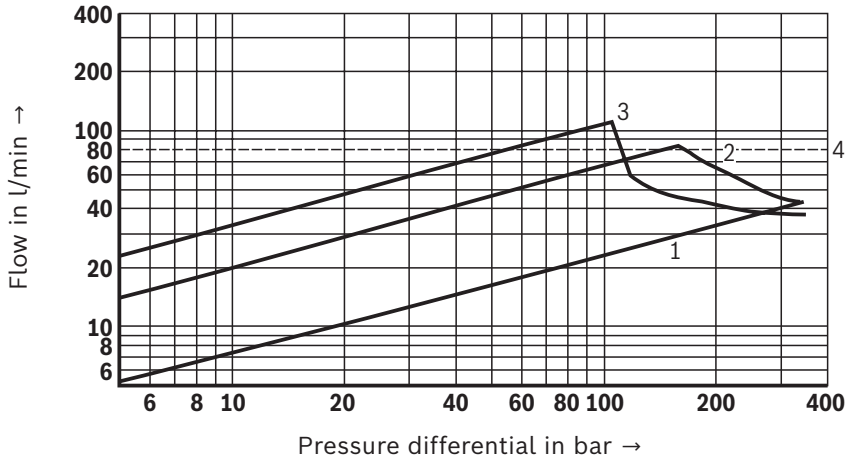Characteristic curves(measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ } ^\circ\text{C}$)**Flow load function with maximum valve opening** (tolerance $\pm 10\%$)**Symbol E**

- 1 8 l/min (summed edge)
- 2 18 l/min (summed edge)
- 3 32 l/min (summed edge)
- 4 Recommended flow (flow velocity 30 m/s)

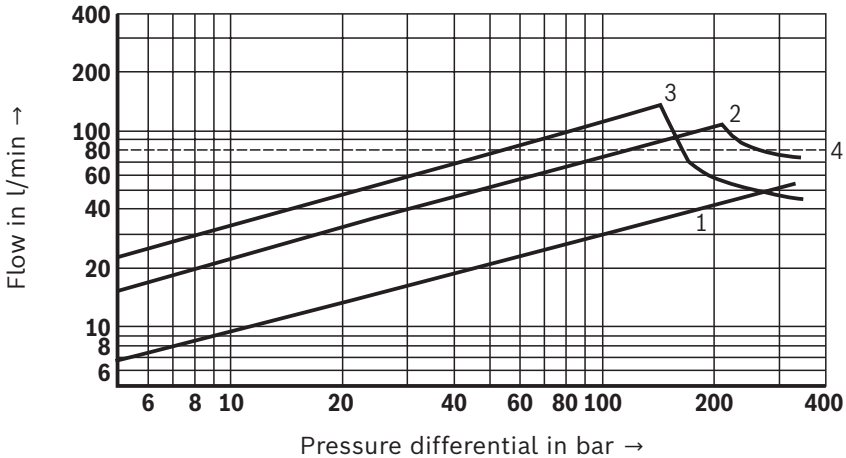Symbol V

- 1 8 l/min (summed edge)
- 2 18 l/min (summed edge)
- 3 32 l/min (summed edge)
- 4 Recommended flow (flow velocity 30 m/s)

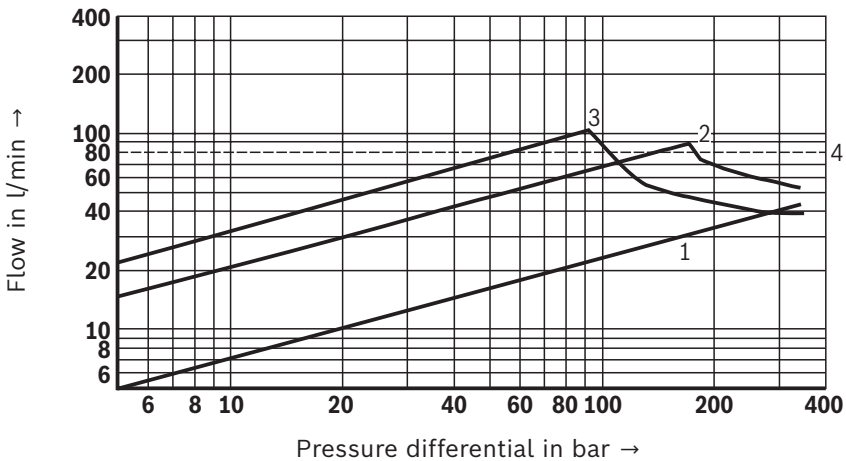Symbol W



- 1 8 l/min (summed edge)
- 2 18 l/min (summed edge)
- 3 32 l/min (summed edge)
- 4 Recommended flow (flow velocity 30 m/s)

**Notice:**

Typical characteristic curves which are subject to tolerance variations.

Dimensions

(dimensions in mm)

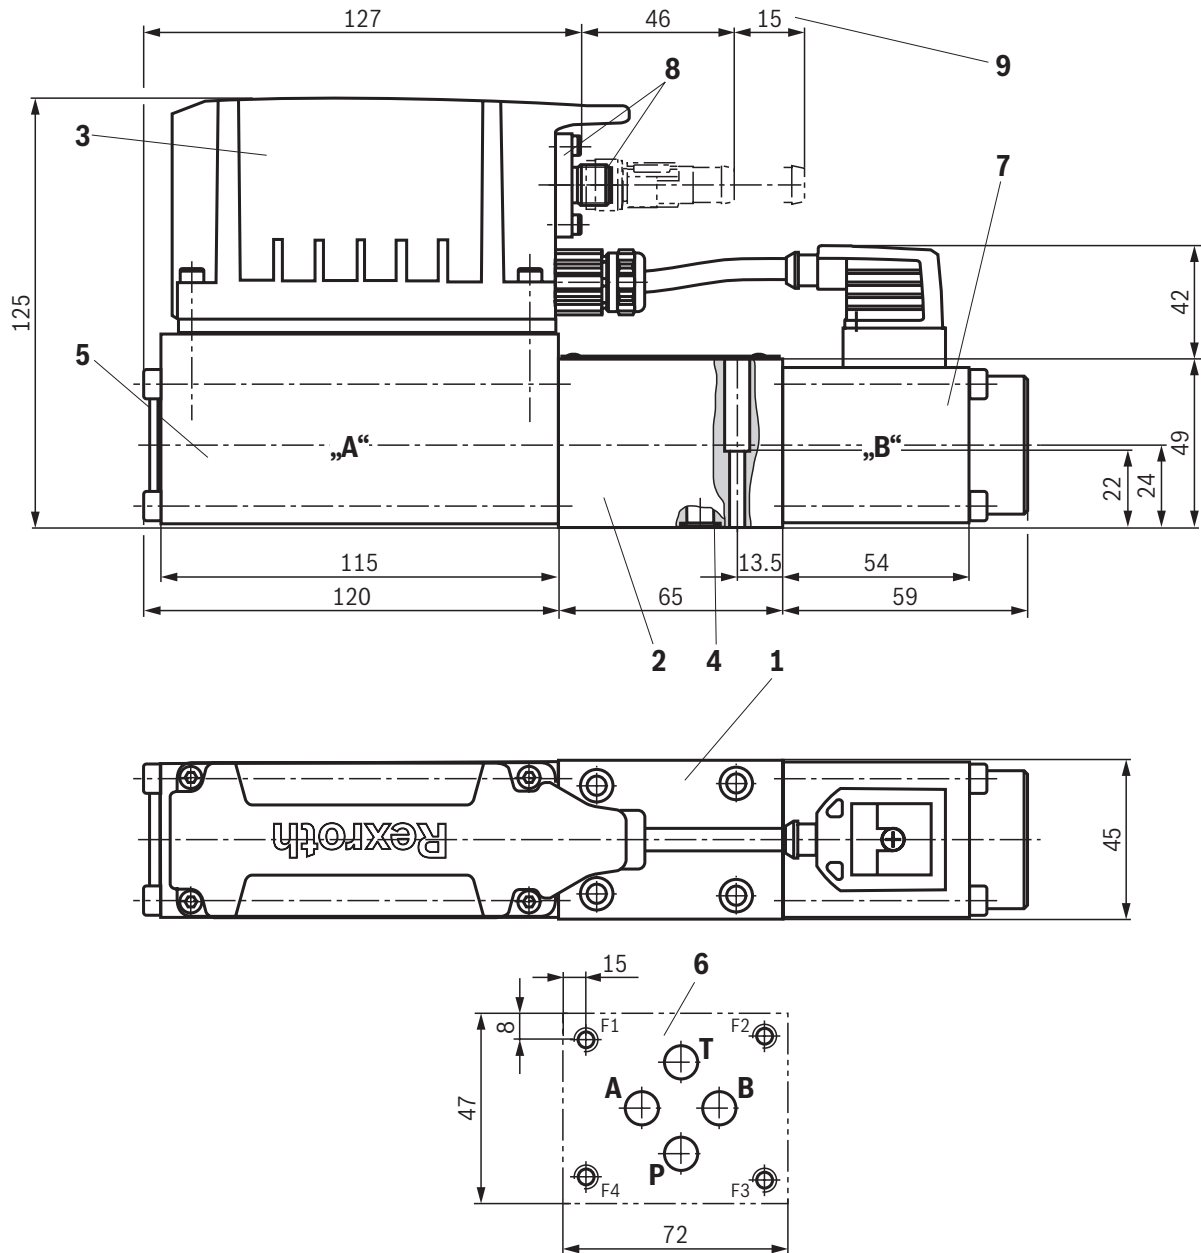

Notices:

- The dimensions are nominal dimensions which are subject to tolerances.
- Mating connectors, separate order, see page 22.

For item explanations, valve mounting screws and subplates, see page 21.

Dimensions

- 1 Name plate
- 2 Valve housing
- 3 Integrated electronics (OBE)
- 4 Identical seal rings for ports A, B, P, T, T1
- 5 Control solenoid with position transducer
- 6 Machined valve contact surface, porting pattern according to ISO 4401-03-02-0-05
- 7 Stroke solenoid
- 8 Mating connectors for version "L1", separate order, see page 22.
- 9 Space required for removing the mating connector

Valve mounting screws (separate order)

Size	Quantity	Hexagon socket head cap screws	Material number
6	4	ISO 4762 - M5 x 30 - 10.9-CM-Fe-ZnNi-5-Cn-T0-H-B (Friction coefficient $\mu_{\text{total}} = 0.09 \dots 0.14$) Tightening torque $M_A = 7 \text{ Nm} \pm 10\%$	R913048086
	or		
	4	ISO 4762 - M5 x 30 - 10.9 Tightening torque $M_A = 8.9 \text{ Nm} \pm 10\%$	Not included in the Rexroth delivery range



Notice:

The tightening torque of the hexagon socket head cap screws refers to the maximum operating pressure.

Subplates (separate order) with porting pattern according to ISO 4401-03-02-0-05 see data sheet 45100.

Accessories (separate order)**Valves with integrated electronics and IO-Link interface**

Cable sets for IO-Link	Length in m	Material number	Data sheet
For the connection of valves with IO-Link interface, M12-5, A-coded, unshielded, line cross-section 5 x 0.34 mm ²	1.5	R901508849	–
	3.0	R901554223	–
	5.0	R901415747	–
	7.5	R901481016	–
	10.0	R901554225	–

Further information

▶ Subplates	Data sheet 45100
▶ Hydraulic fluids on mineral oil basis	Data sheet 90220
▶ Environmentally compatible hydraulic fluids	Data sheet 90221
▶ Flame-resistant, water-free hydraulic fluids	Data sheet 90222
▶ Flame-resistant hydraulic fluids - containing water (HFAE, HFAS, HFB, HFC)	Data sheet 90223
▶ Reliability characteristics according to EN ISO 13849	Data sheet 08012
▶ Hexagon socket head cap screw, metric/UNC	Data sheet 08936
▶ Installation, commissioning and maintenance of servo valves and high-response valves	Data sheet 07700
▶ General product information on hydraulic products	Data sheet 07008
▶ Hydraulic valves for industrial applications	Operating instructions 07600-B
▶ Assembly, commissioning and maintenance of hydraulic systems	Data sheet 07900
▶ Directional control valves, direct operated, with electrical position feedback and IO link interface	Data sheet 29400-PA
▶ Directional control and proportional directional valves with IO-Link interface	Operating instructions 29118-B
▶ Information on available spare parts	www.boschrexroth.com/spc
▶ Connecting hydraulic systems via IO-Link	www.boschrexroth.com/io-link

Notes

Notes

Bosch Rexroth AG
Industrial Hydraulics
Zum Eisengießer 1
97816 Lohr am Main, Germany
Phone +49 (0) 93 52/40 30 20
my.support@boschrexroth.de
www.boschrexroth.de

© All rights reserved to Bosch Rexroth AG, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.
The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification.
It must be remembered that our products are subject to a natural process of wear and aging.